


Environmental Product Declaration (EPD)
According to ISO 14025 and EN 15804



ACEMat™

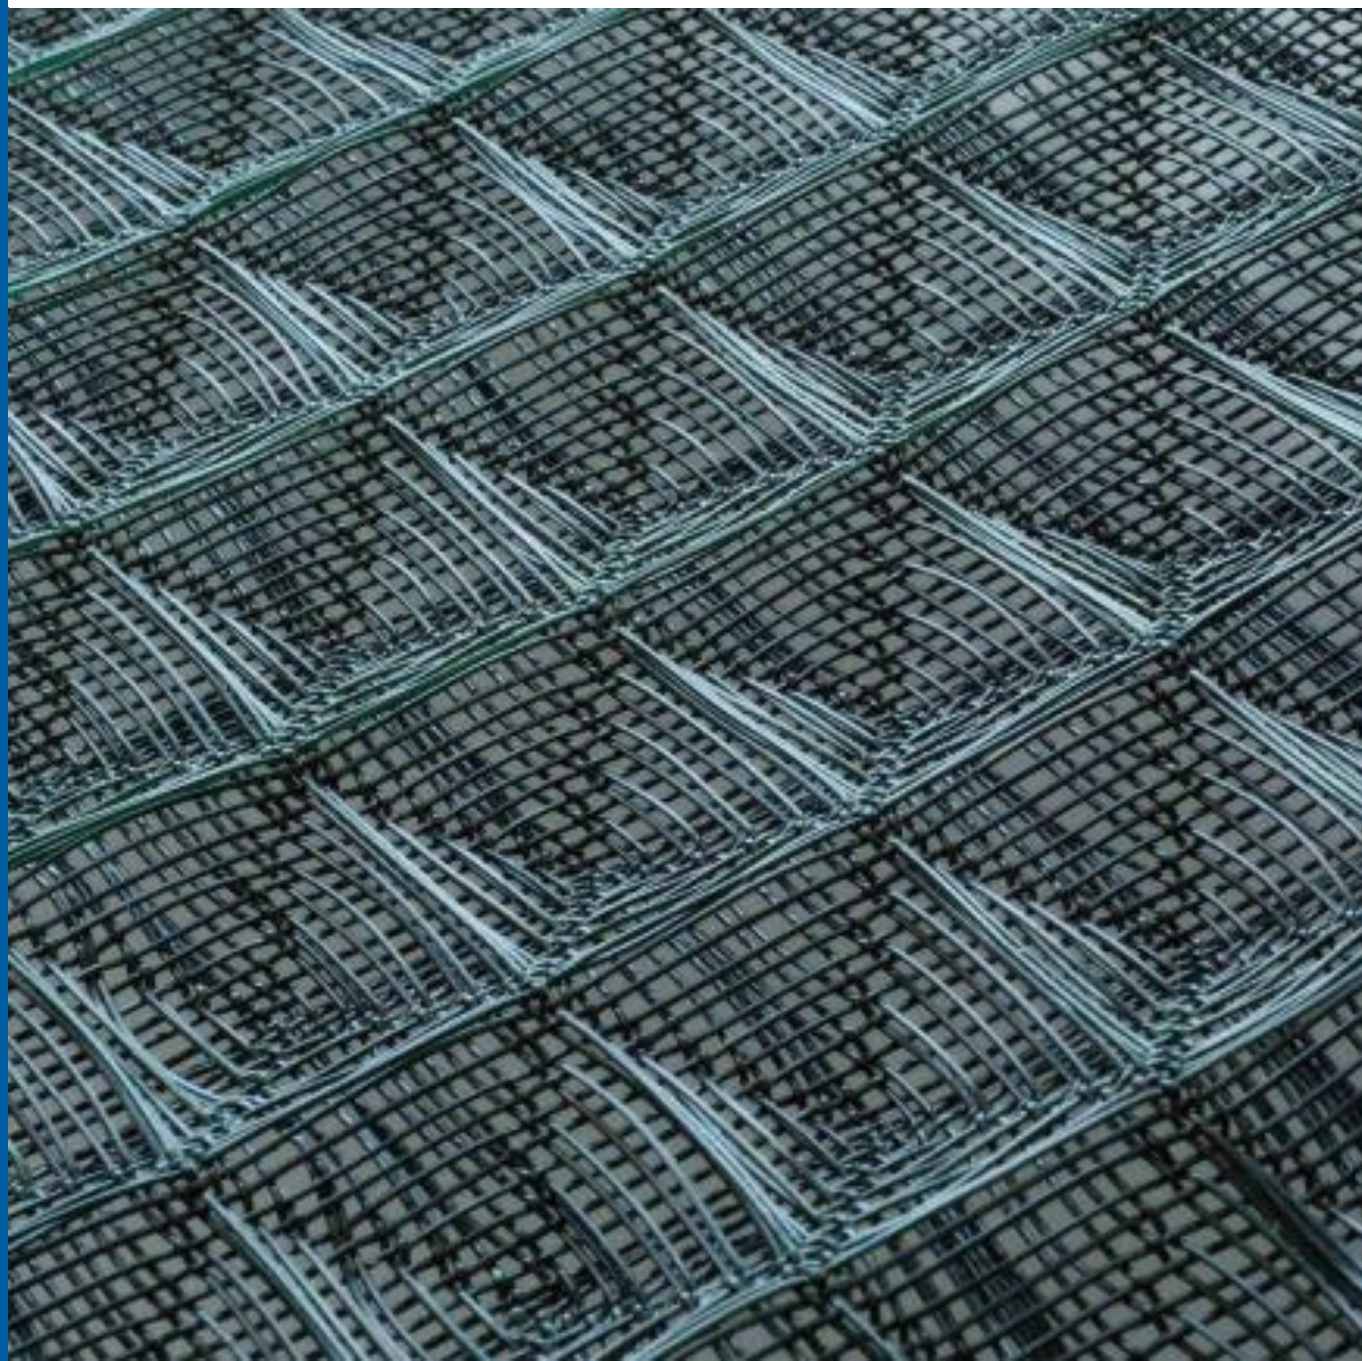

Registration number:	EPD-Kiwa-EE-158056-EN
Issue date:	22-12-2023
Valid until:	22-12-2028
Declaration owner:	Gold-Joint Industry Co., Ltd.
Publisher:	Kiwa-Ecobility Experts
Program operator:	Kiwa-Ecobility Experts
Status:	verified

1 General information

1.1 PRODUCT

ACEMat™

1.2 REGISTRATION NUMBER

EPD-Kiwa-EE-158056-EN

1.3 VALIDITY

Issue date: 22-12-2023

Valid until: 22-12-2028

1.4 PROGRAM OPERATOR

Kiwa-Ecobility Experts
Voltastraße 5
13355 Berlin
DE



Frank Huppertz

(Head of Kiwa-Ecobility Experts)

1.5 OWNER OF THE DECLARATION

Manufacturer: Gold-Joint Industry Co., Ltd.

Address: No.33, Jing 3 Rd. Wuqi Dist., 43541 Taichung City, Taiwan (R.O.C.)

E-mail: marketing@geoace.com

Website: www.geoace.com

Production location: Gold-Joint Industry Co., Ltd.

Address production location: No.33, Jing 3 Rd. Wuqi Dist., 43541 Taichung City

1.6 VERIFICATION OF THE DECLARATION

The independent verification is in accordance with the ISO 14025:2011. The LCA is in compliance with ISO 14040:2006 and ISO 14044:2006. The EN 15804:2012+A2:2019 serves as the core PCR.

Internal External



Elisabeth Amat Guasch, Greenize

1.7 STATEMENTS

The owner of this EPD shall be liable for the underlying information and evidence. The programme operator Kiwa-Ecobility Experts shall not be liable with respect to manufacturer data, life cycle assessment data and evidence.

1.8 PRODUCT CATEGORY RULES

Kiwa-Ecobility Experts (Kiwa-EE) – General Product Category Rules (2022-02-14)

Kiwa-Ecobility Experts (Kiwa-EE) – Specific Product Category Rules: Geosynthetic products (2023-07-21)

1 General information

1.9 COMPARABILITY

In principle, a comparison or assessment of the environmental impacts of different products is only possible if they have been prepared in accordance with EN 15804. For the evaluation of the comparability, the following aspects have to be considered in particular: PCR used, functional or declared unit, geographical reference, the definition of the system boundary, declared modules, data selection (primary or secondary data, background database, data quality), scenarios used for use and disposal phases, and the life cycle inventory (data collection, calculation methods, allocations, validity period). PCRs and general program instructions of different EPDs programs may differ. Comparability needs to be evaluated. For further guidance, see EN 15804+A2 (5.3 Comparability of EPD for construction products) and ISO 14025 (6.7.2 Requirements for comparability).

1.10 CALCULATION BASIS

LCA method R<THiNK: Ecobility Experts | EN15804+A2

LCA software*: Simapro 9.1

Characterization method: EN 15804 +A2 Method v1.0

LCA database profiles: EcoInvent version 3.6

Version database: v3.15 (2023-07-12)

** Used for calculating the characterized results of the Environmental profiles within R<THiNK.*

1.11 LCA BACKGROUND REPORT

This EPD is generated on the basis of the LCA background report 'ACEMat™' with the calculation identifier ReTHiNK-58056.

2 Product

2.1 PRODUCT DESCRIPTION

ACEMat™ is a Turf Reinforcement Mat (TRM) made of high-strength polypropylene monofilament. With its stable and thick three-dimensional woven structures, ACEMat™ is highly effective in controlling severe erosion problems in steep slopes, barren areas, riverbanks, channels, and areas with heavy rainfall. It interlocks with soil to create a solid base, dissipating run-off and stream erosive forces while protecting the soil surface from water splash and wash. Furthermore, it retains seeds and supports plants when vegetation is required, providing exceptional erosion control and enhanced vegetation performance.

ACEMat™						
Product Properties						
	Test	SI Unit	ACEMat™ R	ACEMat™ R III	ACEMat™ R TA	ACEMat™ R III TA
Material			PP Monofilament			
Color	Visual		Dark Green		Tan	
Structure	Visual		3D and Rectangular			
Unit Weight ±20%	ASTM D6566	g/m²	270	340	270	340
Factory Thickness	ASTM D6525	mm	7	10	7	10
Light Penetration	ASTM D6567	%	25	20	25	20
Mechanical Index Properties						
Tensile Strength - MD	ASTM D6818	kN/m	45	60	45	60
Tensile Strength - CD	ASTM D6818	kN/m	30	50	30	50
Elongation - MD	ASTM D6818	%	40	40	40	40
Elongation - CD	ASTM D6818	%	40	40	40	40
Resiliency	ASTM D6524	%	60	60	60	60
Mechanical Performance Properties						
UV Resistance -Retained Strength (3000 hr)	ASTM D4355	%	90	90	90	90
Packing Properties						
Width		m	3.4	3.4	3.4	3.4
Length		m	50	50	50	50

2.2 APPLICATION (INTENDED USE OF THE PRODUCT)

ACEMat™, woven into mesh structures with rectangular pyramid patterns, has shown effectiveness in erosion control and channel protection. This TRM is especially useful in civil engineering for stabilizing slopes. Rain impact can dislodge topsoil, exposing roots and

foundations, thus destabilizing slopes. ACEMat™ not only enhances slope filtration and stabilization but also encourages vegetation growth, offering robust soil and rock slope erosion resistance.

In environmental restoration, ACEMat™'s ability to promote vegetation and retain soil makes it a key tool, especially given rising concerns over land degradation. Additionally, these mats are used in constructing channels and swales where they reduce erosion and support vegetation. Research is underway to evaluate their potential in optimizing hydraulic efficiency and maintaining channel bed integrity. Their relevance is growing in stormwater management, as they could mitigate runoff and facilitate water infiltration, contributing to sustainable practices, particularly as climate-related challenges like increased precipitation become more common.

2.3 REFERENCE SERVICE LIFE

RSL PRODUCT

According to the recommendations of the Erosion Control Technology Council, the Reference Service Life (RSL) of Rolled Erosion Control Products (RECPs) can be categorized as temporary, with subdivisions of 3 months, 12 months, 24 months, and 36 months, and permanent, which is over 36 months. ACEMat™ falls into the permanent category. Additionally, according to the application standards EN 13249 – 13257, EN 13265, and EN 15381, the typical RSL of ACEMat™ is approximately 25 years.

USED RSL (YR) IN THIS LCA CALCULATION:

25

2.4 TECHNICAL DATA

See above (2.1).

2.5 SUBSTANCES OF VERY HIGH CONCERN


The product contains less than 0.1% of substances included in the “Candidate list of substances of very high concern for authorisation” (SVHC).

2.6 DESCRIPTION PRODUCTION PROCESS

The primary material for ACEMat™, PP monofilament, is produced by thoroughly mixing and stirring various plastic pellets, followed by extrusion and stretching processes. After the PP monofilament undergoes the arranging process, it is ready to be fed into the production line for weaving ACEMat™. Weaving is a method of fabric production where two distinct sets of yarn interlace at right angles, forming a longitudinal warp direction

2 Product

(machine direction) and a transversal weft direction (cross-machine direction). Through careful textile design, ACEMat™ displays a rectangular arrangement on its surface. After the fabric undergoes heat shrinking, the yarn forms a three-dimensional rectangular pyramid-like structure. Upon passing visual inspection, the fabric is cut to the required lengths, rolled onto paper tubes for packaging, and then stored in the warehouse.

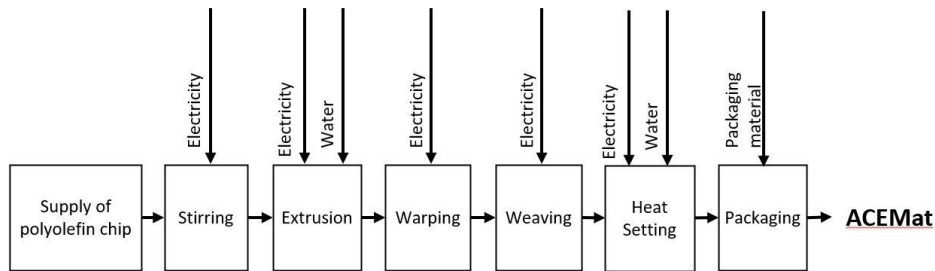

2.7 CONSTRUCTION DESCRIPTION

The construction process for the turf reinforcement mat, ACEMat™, can be categorized into the following stages:

- Preparation of the site

- Placement of ACEMat™
- Execution of anchorage process
- Implementation of hydroseeding process



3 Calculation rules

3.1 DECLARED UNIT

One square meter ACEMat™

m² of ACEMat™. The following products are covered in this EPD: ACEMat™ R, ACEMat™ RIII, ACEMat™ R TA, ACEMat™ RIII TA.

reference_unit: square meter (m2)

3.2 CONVERSION FACTORS

Description	Value	Unit
reference_unit	1	m2
weight_per_reference_unit	1.231	kg
Conversion factor to 1 kg	0.812414	m2

3.3 SCOPE OF DECLARATION AND SYSTEM BOUNDARIES

This is a Cradle to gate with options, modules C1-C4 and module D LCA. The life cycle stages included are as shown below:

(X = module included, ND = module not declared)

A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X

The modules of the EN15804 contain the following:

Module A1 = Raw material supply	Module B5 = Refurbishment
Module A2 = Transport	Module B6 = Operational energy use
Module A3 = Manufacturing	Module B7 = Operational water use
Module A4 = Transport	Module C1 = De-construction / Demolition
Module A5 = Construction - Installation process	Module C2 = Transport
Module B1 = Use	Module C3 = Waste Processing

Module B2 = Maintenance	Module C4 = Disposal
Module B3 = Repair	Module D = Benefits and loads beyond the product system boundaries
Module B4 = Replacement	

3.4 REPRESENTATIVENESS

The input data are representative for ACEMat™, a product of Gold-Joint Industry. The data are representative for Asia.

3.5 CUT-OFF CRITERIA

Product Stage (A1-A3)

All input flows (e.g. raw materials, transportation, energy use, packaging, etc.) and output flows (e.g. production waste) are considered in this LCA. The total neglected input flows do therefore not exceed the limit of 5% of energy use and mass.

Construction process stage (A4-A5)

All input flows (e.g. transportation to the construction site, additional raw material use for construction, installation energy (use)of energy use for assembly , etc.) and output flows (e.g. construction waste, packaging waste, etc.) are considered in this LCA. The total neglected input flows do therefore not exceed the limit of 5% of energy use and mass.

End of life stage (C1-C4)

All input flows (e.g. energy use for demolition or disassembly, transport to waste processing, etc.) and output flows (e.g. end-of-life waste processing of the product, etc.) are considered in this LCA. The total neglected input flows do therefore not exceed the limit of 5% of energy use and mass.

Benefits and Loads beyond the system boundary (Module D)

3 Calculation rules

All benefits and loads beyond the system boundary resulting from reusable products, recyclable materials and/or useful energy carriers leaving the product system are considered in this LCA.

3.6 ALLOCATION

Allocation is based on physical characteristics, on mass. The production data was calculated according to the annual quantity by mass. The raw materials and energy were calculated according to this allocation key.

3.7 DATA COLLECTION & REFERENCE TIME PERIOD

All process-specific data was collected for the operating year 2021.

3.8 ESTIMATES AND ASSUMPTIONS

Almost all the datasets selected for the LCA refer to the RoW as the geographical reference, as there were no specific environmental profiles available.

Gold-Joint delivers its product to different countries, so the calculation of transport to construction site (A4) was done by taking the average distance, weighted by the proportion of product shipped to each country. For module A4, a data set for a non-specific truck and a transoceanic ship was used.

A scaling method was used to calculate the LCA results for the different ACEMat™ products. The scaling was done on the basis of mass per square meter. As a result of scaling there are results for both the fixed and the scalable part of the scaling function. The fixed part means that this number is the same for each product in the product group and the scalable part is the part that depends on the mass per unit area of the product. In order to calculate the correct number of each environmental impact category for each of the products in the product group, the following calculation should be done:

$$[\text{number fixed part}] + ([\text{specific mass}] * [\text{number scalable part}])$$

The input cardboard tube did not have a linear dependence on the specific mass, so the higher quantity of product available was always taken into account to make the scaling as conservative as possible.

The input cardboard tube was not having a linear dependence on the specific mass, thus the higher amount of the product available was always considered for the scaling to be as conservative as possible.

For C1 the method and amount of the generic data set 'Polyester weefsel' from chapter 22.46 Grondwapening en grondscheiding of the DuboCalc programme (database version NMD 1.8 - 5.01.14052018) was used. In this generic data set, 0.0013h work per m² of geotextile was assumed.

3.9 DATA QUALITY

All process-specific data was collected for the 2021 operating year and is therefore up-to-date. The data is based on the annual average. In order to ensure comparability of the results, only consistent background data of the Ecoinvent database V3.6 was used in the LCA (e.g., records on energy, transportation, and supplies), which refers to reference year 2019. The database is regularly reviewed and thus complies with the requirements of EN 15804 (background data not older than 10 years). All consistent datasets contained in the Ecoinvent database are documented and can be viewed in the online Ecoinvent documentation. The primary data were provided by Gold-Joint. The life cycle was modelled with the R<THiNK EPD App.

3.10 GUARANTEES OF ORIGIN

In this EPD, the local based approach was considered for the LCA, therefore no guarantees of origin (GO) are needed.

3 Calculation rules

3.12 SCALING

Parameter	Value
Scaling type	Linear
Description dimension	Specific mass
Dimension	0.000
Scalable dimension	1.000
Unit dimension	kg/m ²

4 Scenarios and additional technical information

4.1 TRANSPORT TO CONSTRUCTION SITE (A4)

For the transport from production place to assembly/user, the following scenario is assumed for module A4 of this EPD.

	Value and unit
Vehicle type used for transport	Transoceanic ship / Lorry unspecified
Fuel type and consumption of vehicle	
Distance	5591 km
Capacity utilisation (including empty returns)	
Bulk density of transported products	
Volume capacity utilisation factor	

4.2 ASSEMBLY (A5)

The following information describes the scenarios for flows entering the system and flows leaving the system at module A5.

FLOWS ENTERING THE SYSTEM

For flows entering the system at A5 the following scenario is assumed for module A5.

	Value	Unit
<i>Materials used for installation/assembly</i>		
Glass fibre reinforced plastic, polyamide, injection moulded {RoW} production Cut-off, U	0.11235	kg

FLOWS LEAVING THE SYSTEM

The following output flows leaving the system at module A5 are assumed.

Description	Value	Unit
Output materials as result of loss during construction	5	%
Output materials as result of waste processing of materials used for installation/assembly at the building site	0.112	kg
Output materials as result of waste processing of used packaging	0.054	kg

4.3 DE-CONSTRUCTION, DEMOLITION (C1)

The following information describes the scenario for demolition at end of life.

4 Scenarios and additional technical information

Description	Amount	Unit
Hydraulic excavator (average) [NMD]	0.001	hr

4.4 TRANSPORT END-OF-LIFE (C2)

The following distances and transport conveyance are assumed for transportation during end of life for the different types of waste processing.

Waste Scenario	Transport conveyance	Not removed (stays in work) [km]	Landfill [km]	Incineration [km]	Recycling [km]	Re-use [km]
PE/PP soil reinforcement (geotextile and geogrid 54)	Lorry (Truck), unspecified (default) market group for (GLO)	0	100	150	50	0
finishes (adhered to wood, plastic, metal) (NMD ID 2)	Lorry (Truck), unspecified (default) market group for (GLO)	0	100	150	50	0

The transport conveyance(s) used in the scenario(s) for transport during end of life has the following characteristics.

	Value and unit
Vehicle type used for transport	Lorry (Truck), unspecified (default) market group for (GLO)
Fuel type and consumption of vehicle	not available
Capacity utilisation (including empty returns)	50 % (loaded up and return empty)
Bulk density of transported products	inapplicable
Volume capacity utilisation factor	1

4.5 END OF LIFE (C3, C4)

The scenario(s) assumed for end of life of the product are given in the following tables. First the assumed percentages per type of waste processing are displayed, followed by the assumed amounts.

Waste Scenario	Region	Not removed (stays in work) [%]	Landfill [%]	Incineration [%]	Recycling [%]	Re-use [%]
PE/PP soil reinforcement (geotextile and geogrid 54)	NL	25	0	70	5	0

4 Scenarios and additional technical information

Waste Scenario	Region	Not removed (stays in work) [%]	Landfill [%]	Incineration [%]	Recycling [%]	Re-use [%]
finishes (adhered to wood, plastic, metal) (NMD ID 2)	NL	0	0	100	0	0

Waste Scenario	Not removed (stays in work) [kg]	Landfill [kg]	Incineration [kg]	Recycling [kg]	Re-use [kg]
PE/PP soil reinforcement (geotextile and geogrid 54)	0.322	0.000	0.902	0.064	0.000
finishes (adhered to wood, plastic, metal) (NMD ID 2)	0.000	0.000	0.014	0.000	0.000
Total	0.322	0.000	0.916	0.064	0.000

4.6 BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY (D)

The presented Benefits and loads beyond the system boundary in this EPD are based on the following calculated Net output flows in kilograms and Energy recovery displayed in MJ Lower Heating Value.

Waste Scenario	Net output flow [kg]	Energy recovery [MJ]
PE/PP soil reinforcement (geotextile and geogrid 54)	0.061	33.846
finishes (adhered to wood, plastic, metal) (NMD ID 2)	0.000	0.000
Total	0.061	33.846

5 Results

For the impact assessment, the characterization factors of the LCIA method EN 15804 +A2 Method v1.0 are used. Long-term emissions (>100 years) are not considered in the impact assessment. The results of the impact assessment are only relative statements that do not make any statements about end-points of the impact categories, exceedance of threshold values, safety margins or risks. The following tables show the results of the indicators of the impact assessment, of the use of resources as well as of waste and other output flows.

5 Results

5.1 ENVIRONMENTAL IMPACT INDICATORS PER SQUARE METER (FIXED PART)

CORE ENVIRONMENTAL IMPACT INDICATORS EN15804+A2

Abbreviation	Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
AP	mol H+ eqv.	-6.87E-4	-9.90E-6	9.30E-6	-1.17E-4	4.54E-3	7.12E-4	-6.11E-6	-6.07E-5	-1.65E-6	9.73E-5
GWP-total	kg CO2 eqv.	-1.72E-1	-1.71E-3	-5.61E-3	-1.00E-2	1.33E+0	6.81E-2	-1.05E-3	-1.36E-1	-2.65E-3	9.47E-2
GWP-b	kg CO2 eqv.	-1.90E-4	-7.88E-7	-2.22E-4	-6.19E-6	1.81E-2	1.89E-5	-4.86E-7	-1.95E-5	-2.04E-6	6.20E-5
GWP-f	kg CO2 eqv.	-1.71E-1	-1.71E-3	-5.45E-3	-9.99E-3	1.31E+0	6.81E-2	-1.05E-3	-1.36E-1	-2.65E-3	9.47E-2
GWP-luluc	kg CO2 eqv.	-5.21E-5	-6.26E-7	6.42E-5	-4.14E-6	2.26E-4	5.37E-6	-3.86E-7	-1.09E-5	-9.37E-8	-2.70E-7
EP-m	kg N eqv.	-1.17E-4	-3.49E-6	9.07E-6	-2.91E-5	1.41E-3	3.14E-4	-2.15E-6	-1.66E-5	-1.00E-6	2.57E-5
EP-fw	kg P eqv.	-3.68E-6	-1.72E-8	2.76E-7	-1.18E-7	1.17E-5	2.48E-7	-1.06E-8	-4.05E-7	-3.40E-9	1.90E-7
EP-T	mol N eqv.	-1.30E-3	-3.85E-5	7.87E-5	-3.25E-4	7.94E-3	3.45E-3	-2.37E-5	-1.85E-4	-6.08E-6	2.82E-4
ODP	kg CFC 11 eqv.	-3.39E-9	-3.77E-10	1.00E-9	-2.13E-9	2.05E-8	1.47E-8	-2.33E-10	-4.11E-9	-5.86E-11	1.15E-8
POCP	kg NMVOC eqv.	-5.40E-4	-1.10E-5	-5.65E-6	-8.88E-5	2.64E-3	9.49E-4	-6.78E-6	-4.97E-5	-2.33E-6	1.01E-4
ADP-f	MJ	-5.38E+0	-2.57E-2	-1.00E-1	-1.48E-1	1.47E+1	9.37E-1	-1.59E-2	-1.05E-1	-4.49E-3	1.72E+0
ADP-mm	kg Sb-eqv.	-1.57E-6	-4.33E-8	-1.01E-8	-1.75E-7	2.09E-6	1.04E-7	-2.67E-8	-1.72E-7	-2.03E-9	8.66E-8
WDP	m3 world eqv.	-6.34E-2	-9.21E-5	3.40E-5	-6.48E-4	9.81E-1	1.26E-3	-5.68E-5	-6.84E-3	-1.92E-4	1.24E-2

AP=Acidification (AP) | **GWP-total**=Global warming potential (GWP-total) | **GWP-b**=Global warming potential - Biogenic (GWP-b) | **GWP-f**=Global warming potential - Fossil (GWP-f) | **GWP-luluc**=Global warming potential - Land use and land use change (GWP-luluc) | **EP-m**=Eutrophication marine (EP-m) | **EP-fw**=Eutrophication, freshwater (EP-fw) | **EP-T**=Eutrophication, terrestrial (EP-T) | **ODP**=Ozone depletion (ODP) | **POCP**=Photochemical ozone formation - human health (POCP) | **ADP-f**=Resource use, fossils (ADP-f) | **ADP-mm**=Resource use, minerals and metals (ADP-mm) | **WDP**=Water use (WDP)

5 Results

ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS EN15084+A2

Abbreviation	Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
ETP-fw	CTUe	-2.02E+0	-2.30E-2	8.82E-1	-1.22E-1	4.40E+0	5.65E-1	-1.42E-2	-1.69E+0	-4.77E-3	1.24E-1
PM	disease incidence	-5.62E-9	-1.54E-10	4.47E-10	-7.07E-10	4.94E-8	1.89E-8	-9.48E-11	-4.92E-10	-3.12E-11	4.11E-10
HTP-c	CTUh	-3.97E-11	-7.45E-13	-8.75E-12	-3.99E-12	5.18E-10	1.97E-11	-4.60E-13	-2.82E-11	-1.25E-13	7.29E-12
HTP-nc	CTUh	-1.24E-9	-2.51E-11	1.70E-11	-1.23E-10	4.18E-9	4.85E-10	-1.55E-11	-5.41E-10	-3.11E-12	1.19E-10
IR	kBq U235 eqv.	-1.74E-3	-1.08E-4	5.34E-5	-6.30E-4	1.13E-2	4.02E-3	-6.66E-5	-4.29E-4	-1.76E-5	6.33E-4
SQP	Pt	-1.94E-1	-2.23E-2	3.72E-1	-9.41E-2	1.42E+0	1.20E-1	-1.38E-2	-3.86E-2	-1.06E-2	-6.00E-1

ETP-fw=Ecotoxicity, freshwater (ETP-fw) | **PM**=Particulate Matter (PM) | **HTP-c**=Human toxicity, cancer (HTP-c) | **HTP-nc**=Human toxicity, non-cancer (HTP-nc) | **IR**=Ionising radiation, human health (IR) | **SQP**=Land use (SQP)

CLASSIFICATION OF DISCLAIMERS TO THE DECLARATION OF CORE AND ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS

ILCD classification	Indicator	Disclaimer
ILCD type / level 1	Global warming potential (GWP)	None
	Depletion potential of the stratospheric ozone layer (ODP)	None
	Potential incidence of disease due to PM emissions (PM)	None
	AAcidification potential, Accumulated Exceedance (AP)	None
	Eutrophication potential, Fraction of nutrients reaching freshwater end compartment (EP-freshwater)	None
ILCD type / level 2	Eutrophication potential, Fraction of nutrients reaching marine end compartment (EP-marine)	None
	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	None
	Formation potential of tropospheric ozone (POCP)	None
	Potential Human exposure efficiency relative to U235 (IRP)	1
ILCD type / level 3	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	2
	Abiotic depletion potential for fossil resources (ADP-fossil)	2
	Water (user) deprivation potential, deprivation-weighted water consumption (WDP)	2
	Potential Comparative Toxic Unit for ecosystems (ETP-fw)	2

5 Results

ILCD classification	Indicator	Disclaimer
	Potential Comparative Toxic Unit for humans (HTP-c)	2
	Potential Comparative Toxic Unit for humans (HTP-nc)	2
	Potential Soil quality index (SQP)	2

Disclaimer 1 – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Disclaimer 2 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

5.2 ENVIRONMENTAL IMPACT INDICATORS PER SQUARE METER (SCALABLE PART)

CORE ENVIRONMENTAL IMPACT INDICATORS EN15804+A2

Abbreviation	Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
AP	mol H+ eqv.	1.24E-2	3.86E-5	9.01E-3	2.62E-3	1.28E-3	0.00E+0	1.10E-4	1.09E-3	2.98E-5	-1.83E-3
GWP-total	kg CO2 eqv.	3.10E+0	6.66E-3	2.22E+0	2.23E-1	5.16E-1	0.00E+0	1.90E-2	2.45E+0	4.78E-2	-1.78E+0
GWP-b	kg CO2 eqv.	3.42E-3	3.07E-6	-8.14E-3	1.38E-4	-2.03E-4	0.00E+0	8.77E-6	3.52E-4	3.68E-5	-1.14E-3
GWP-f	kg CO2 eqv.	3.09E+0	6.65E-3	2.23E+0	2.23E-1	5.16E-1	0.00E+0	1.90E-2	2.45E+0	4.78E-2	-1.78E+0
GWP-luluc	kg CO2 eqv.	9.36E-4	2.44E-6	1.90E-4	9.23E-5	7.20E-5	0.00E+0	6.96E-6	1.97E-4	1.69E-6	-8.82E-5
EP-m	kg N eqv.	2.11E-3	1.36E-5	1.22E-3	6.50E-4	2.24E-4	0.00E+0	3.88E-5	3.00E-4	1.81E-5	-4.87E-4
EP-fw	kg P eqv.	6.63E-5	6.71E-8	6.47E-5	2.63E-6	7.09E-6	0.00E+0	1.92E-7	7.30E-6	6.13E-8	-4.07E-6
EP-T	mol N eqv.	2.35E-2	1.50E-4	1.36E-2	7.24E-3	2.50E-3	0.00E+0	4.28E-4	3.34E-3	1.10E-4	-5.36E-3
ODP	kg CFC 11 eqv.	6.05E-8	1.47E-9	8.84E-8	4.75E-8	1.48E-8	0.00E+0	4.19E-9	7.41E-8	1.06E-9	-2.17E-7
POCP	kg NMVOC eqv.	9.72E-3	4.28E-5	4.43E-3	1.98E-3	8.84E-4	0.00E+0	1.22E-4	8.97E-4	4.20E-5	-1.92E-3

AP=Acidification (AP) | **GWP-total**=Global warming potential (GWP-total) | **GWP-b**=Global warming potential - Biogenic (GWP-b) | **GWP-f**=Global warming potential - Fossil (GWP-f) | **GWP-luluc**=Global warming potential - Land use and land use change (GWP-luluc) | **EP-m**=Eutrophication marine (EP-m) | **EP-fw**=Eutrophication, freshwater (EP-fw) | **EP-T**=Eutrophication, terrestrial (EP-T) | **ODP**=Ozone depletion (ODP) | **POCP**=Photochemical ozone formation - human health (POCP) | **ADP-f**=Resource use, fossils (ADP-f) | **ADP-mm**=Resource use, minerals and metals (ADP-mm) | **WDP**=Water use (WDP)

5 Results

Abbreviation	Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
ADP-f	MJ	9.71E+1	1.00E-1	3.28E+1	3.30E+0	6.89E+0	0.00E+0	2.86E-1	1.89E+0	8.09E-2	-3.23E+1
ADP-mm	kg Sb-equiv.	2.83E-5	1.69E-7	5.09E-6	3.90E-6	2.09E-6	0.00E+0	4.81E-7	3.11E-6	3.66E-8	-1.65E-6
WDP	m ³ world eqv.	1.14E+0	3.59E-4	3.38E-1	1.45E-2	8.11E-2	0.00E+0	1.02E-3	1.23E-1	3.46E-3	-2.28E-1

AP=Acidification (AP) | **GWP-total**=Global warming potential (GWP-total) | **GWP-b**=Global warming potential - Biogenic (GWP-b) | **GWP-f**=Global warming potential - Fossil (GWP-f) | **GWP-luluc**=Global warming potential - Land use and land use change (GWP-luluc) | **EP-m**=Eutrophication marine (EP-m) | **EP-fw**=Eutrophication, freshwater (EP-fw) | **EP-T**=Eutrophication, terrestrial (EP-T) | **ODP**=Ozone depletion (ODP) | **POCP**=Photochemical ozone formation - human health (POCP) | **ADP-f**=Resource use, fossils (ADP-f) | **ADP-mm**=Resource use, minerals and metals (ADP-mm) | **WDP**=Water use (WDP)

ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS EN15084+A2

Abbreviation	Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
ETP-fw	CTUe	3.64E+1	8.95E-2	2.31E+1	2.72E+0	4.70E+0	0.00E+0	2.55E-1	3.04E+1	8.60E-2	-2.35E+0
PM	disease incidence	1.01E-7	5.99E-10	2.78E-8	1.58E-8	7.99E-9	0.00E+0	1.71E-9	8.87E-9	5.62E-10	-7.84E-9
HTP-c	CTUh	7.13E-10	2.90E-12	5.89E-10	8.91E-11	2.33E-10	0.00E+0	8.28E-12	5.06E-10	2.26E-12	-1.39E-10
HTP-nc	CTUh	2.24E-8	9.79E-11	1.59E-8	2.75E-9	3.00E-9	0.00E+0	2.79E-10	9.75E-9	5.60E-11	-2.30E-9
IR	kBq U235 eqv.	3.12E-2	4.20E-4	8.02E-2	1.41E-2	6.86E-3	0.00E+0	1.20E-3	7.73E-3	3.17E-4	-1.20E-2
SQP	Pt	3.49E+0	8.70E-2	2.89E+0	2.10E+0	5.01E-1	0.00E+0	2.48E-1	6.96E-1	1.91E-1	-5.52E-1

ETP-fw=Ecotoxicity, freshwater (ETP-fw) | **PM**=Particulate Matter (PM) | **HTP-c**=Human toxicity, cancer (HTP-c) | **HTP-nc**=Human toxicity, non-cancer (HTP-nc) | **IR**=Ionising radiation, human health (IR) | **SQP**=Land use (SQP)

CLASSIFICATION OF DISCLAIMERS TO THE DECLARATION OF CORE AND ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS

ILCD classification	Indicator	Disclaimer
ILCD type / level 1	Global warming potential (GWP)	None
	Depletion potential of the stratospheric ozone layer (ODP)	None
	Potential incidence of disease due to PM emissions (PM)	None
ILCD type / level 2	AAcidification potential, Accumulated Exceedance (AP)	None
		None

5 Results

ILCD classification	Indicator	Disclaimer
ILCD type / level 3	Eutrophication potential, Fraction of nutrients reaching freshwater end compartment (EP-freshwater)	
	Eutrophication potential, Fraction of nutrients reaching marine end compartment (EP-marine)	None
	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	None
	Formation potential of tropospheric ozone (POCP)	None
	Potential Human exposure efficiency relative to U235 (IRP)	1
	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	2
	Abiotic depletion potential for fossil resources (ADP-fossil)	2
	Water (user) deprivation potential, deprivation-weighted water consumption (WDP)	2
	Potential Comparative Toxic Unit for ecosystems (ETP-fw)	2
	Potential Comparative Toxic Unit for humans (HTP-c)	2
	Potential Comparative Toxic Unit for humans (HTP-nc)	2
	Potential Soil quality index (SQP)	2

Disclaimer 1 – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Disclaimer 2 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

5 Results

5.3 ENVIRONMENTAL IMPACT INDICATORS PER SQUARE METER (FIXED PART)

PARAMETERS DESCRIBING RESOURCE USE

Abbreviation	Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	-6.09E-2	-3.22E-4	6.99E-2	-2.21E-3	4.55E-1	5.07E-3	-1.99E-4	-1.06E-2	-7.94E-5	-1.01E-1
PERM	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
PERT	MJ	-6.09E-2	-3.22E-4	6.99E-2	-2.21E-3	4.55E-1	5.07E-3	-1.99E-4	-1.06E-2	-7.94E-5	-1.01E-1
PENRE	MJ	-2.77E+0	-2.73E-2	-1.22E-1	-1.57E-1	1.60E+1	9.95E-1	-1.69E-2	-1.11E-1	-4.77E-3	1.74E+0
PENRM	MJ	-3.01E+0	0.00E+0	1.90E-2	0.00E+0	-1.49E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	1.59E-1
PENRT	MJ	-5.78E+0	-2.73E-2	-1.03E-1	-1.57E-1	1.58E+1	9.95E-1	-1.69E-2	-1.11E-1	-4.77E-3	1.90E+0
SM	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
RSF	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
NRSF	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
FW	M3	-1.56E-3	-3.14E-6	1.74E-5	-2.13E-5	2.34E-2	4.83E-5	-1.94E-6	-2.01E-4	-4.68E-6	1.74E-4

PERE=renewable primary energy ex. raw materials | **PERM**=renewable primary energy used as raw materials | **PERT**=renewable primary energy total | **PENRE**=non-renewable primary energy ex. raw materials | **PENRM**=non-renewable primary energy used as raw materials | **PENRT**=non-renewable primary energy total | **SM**=use of secondary material | **RSF**=use of renewable secondary fuels | **NRSF**=use of non-renewable secondary fuels | **FW**=use of net fresh water

OTHER ENVIRONMENTAL INFORMATION DESCRIBING WASTE CATEGORIES

Abbreviation	Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
HWD	Kg	-5.93E-7	-6.52E-8	1.64E-7	-2.93E-7	6.79E-6	2.55E-6	-4.03E-8	-2.02E-7	-6.82E-9	1.87E-6
NHWD	Kg	-8.60E-3	-1.63E-3	1.13E-3	-6.42E-3	8.62E-2	1.11E-3	-1.01E-3	-2.61E-3	-1.79E-2	7.24E-4
RWD	Kg	-1.62E-6	-1.69E-7	4.57E-8	-9.68E-7	1.12E-5	6.51E-6	-1.04E-7	-3.77E-7	-2.67E-8	8.35E-7

HWD=hazardous waste disposed | **NHWD**=non hazardous waste disposed | **RWD**=radioactive waste disposed

5 Results

ENVIRONMENTAL INFORMATION DESCRIBING OUTPUT FLOWS

Abbreviation	Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
CRU	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
MFR	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	9.27E-3	0.00E+0	0.00E+0	-3.58E-3	0.00E+0	0.00E+0
MER	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EET	MJ	0.00E+0	0.00E+0	-4.40E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-6.50E-1
EEE	MJ	0.00E+0	0.00E+0	-2.56E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-3.77E-1

CRU=Components for re-use | MFR=Materials for recycling | MER=Materials for energy recovery | EET=Exported Energy Thermic | EEE=Exported Energy Electric

5.4 ENVIRONMENTAL IMPACT INDICATORS PER SQUARE METER (SCALABLE PART)

PARAMETERS DESCRIBING RESOURCE USE

Abbreviation	Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	1.09E+0	1.26E-3	1.20E+0	4.92E-2	1.28E-1	0.00E+0	3.58E-3	1.91E-1	1.43E-3	-1.39E-1
PERM	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
PERT	MJ	1.09E+0	1.26E-3	1.20E+0	4.92E-2	1.28E-1	0.00E+0	3.58E-3	1.91E-1	1.43E-3	-1.39E-1
PENRE	MJ	4.99E+1	1.07E-1	3.05E+1	3.50E+0	4.45E+0	0.00E+0	3.04E-1	2.01E+0	8.60E-2	-3.28E+1
PENRM	MJ	5.42E+1	0.00E+0	4.31E+0	0.00E+0	2.93E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-2.87E+0
PENRT	MJ	1.04E+2	1.07E-1	3.48E+1	3.50E+0	7.37E+0	0.00E+0	3.04E-1	2.01E+0	8.60E-2	-3.56E+1
SM	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
RSF	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
NRSF	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
FW	M3	2.81E-2	1.22E-5	9.41E-3	4.74E-4	2.10E-3	0.00E+0	3.49E-5	3.63E-3	8.44E-5	-3.23E-3

PERE=renewable primary energy ex. raw materials | PERM=renewable primary energy used as raw materials | PERT=renewable primary energy total | PENRE=non-renewable primary energy ex. raw materials | PENRM=non-renewable primary energy used as raw materials | PENRT=non-renewable primary energy total | SM=use of secondary material | RSF=use of renewable secondary fuels | NRSF=use of non-renewable secondary fuels | FW=use of net fresh water

5 Results

OTHER ENVIRONMENTAL INFORMATION DESCRIBING WASTE CATEGORIES

Abbreviation	Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
HWD	Kg	1.06E-5	2.54E-7	1.07E-5	6.54E-6	1.92E-6	0.00E+0	7.26E-7	3.64E-6	1.23E-7	-3.54E-5
NHWD	Kg	1.55E-1	6.37E-3	1.17E-1	1.43E-1	4.32E-2	0.00E+0	1.82E-2	4.71E-2	3.23E-1	-1.53E-2
RWD	Kg	2.89E-5	6.59E-7	7.11E-5	2.16E-5	6.73E-6	0.00E+0	1.88E-6	6.79E-6	4.81E-7	-1.60E-5

HWD=hazardous waste disposed | NHWD=non hazardous waste disposed | RWD=radioactive waste disposed

ENVIRONMENTAL INFORMATION DESCRIBING OUTPUT FLOWS

Abbreviation	Unit	A1	A2	A3	A4	A5	C1	C2	C3	C4	D
CRU	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
MFR	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	3.22E-3	0.00E+0	0.00E+0	6.45E-2	0.00E+0	0.00E+0
MER	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EET	MJ	0.00E+0	0.00E+0	7.93E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	1.22E+1
EEE	MJ	0.00E+0	0.00E+0	4.61E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	7.10E+0

CRU=Components for re-use | MFR=Materials for recycling | MER=Materials for energy recovery | EET=Exported Energy Thermic | EEE=Exported Energy Electric

5 Results


5.5 INFORMATION ON BIOGENIC CARBON CONTENT PER SQUARE METER

BIOGENIC CARBON CONTENT

The following Information describes the biogenic carbon content in (the main parts of) the product at the factory gate per square meter:

Biogenic carbon content	Amount	Unit
Biogenic carbon content in the product	0	kg C
Biogenic carbon content in accompanying packaging	0	kg C

6 Interpretation of results

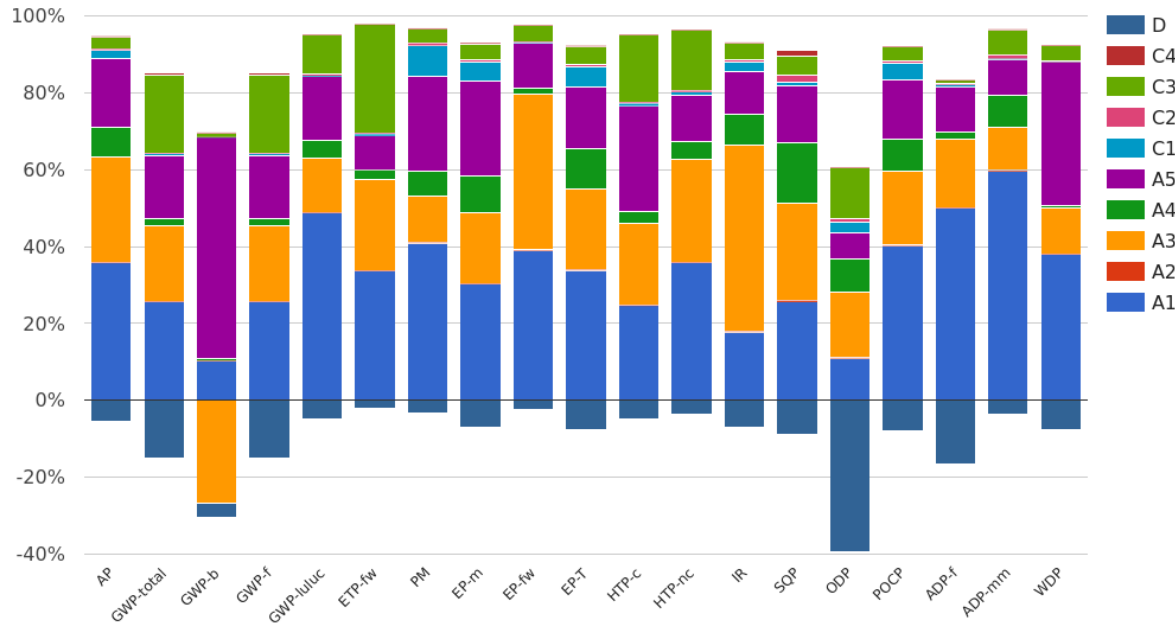

As shown in the figure below, the production process (A3) dominates in most environmental core indicators, followed by installation into the building (A5) and production process (A3). The highest influence on the Global Warming Potential have raw material supply (A1), production process (A3) and waste processing (C3). Transports (A2, C2) have rather a minor impact within all core indicators.

7 References

ISO 14040

ISO 14040:2006-10, Environmental management - Life cycle assessment - Principles and framework; EN ISO 14040:2006

ISO 14044

ISO 14044:2006-10, Environmental management - Life cycle assessment - Requirements and guidelines; EN ISO 14040:2006

ISO 14025

ISO 14025:2011-10: Environmental labels and declarations — Type III environmental declarations — Principles and procedures

EN 15804+A2

EN 15804+A2: 2019: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

PCR A: General Program Category Rules for Construction Products from the EPD program Kiwa-Ecobility Experts, 2022-02-14

PCR B: Product Category Rules (PCR) from the Kiwa-Ecobility Experts (Kiwa-EE) – Specific Product Category Rules: Geosynthetic products, 2023-07-21

8 Contact information

Publisher	Operator	Owner of declaration
 <p>Kiwa-Ecobility Experts Voltastraße 5 13355 Berlin, DE</p>	 <p>Kiwa-Ecobility Experts Voltastraße 5 13355 Berlin, DE</p>	 <p>Gold-Joint Industry Co., Ltd. No.33, Jing 3 Rd. Wuqi Dist. 43541 Taichung City, Taiwan (R.O.C.), TW</p>
<p>E-mail: DE.Ecobility.Experts@kiwa.com</p> <p>Website: https://www.kiwa.com/de/en/themes/ecobility-experts/ecobility-experts-epd-program/</p>	<p>E-mail: DE.Ecobility.Experts@kiwa.com</p> <p>Website: https://www.kiwa.com/de/en/themes/ecobility-experts/ecobility-experts-epd-program/</p>	<p>E-mail: marketing@geoace.com</p> <p>Website: www.geoace.com</p>

Kiwa-Ecobility Experts is established member of the 